




MV-33

3-pc Ball Valve


- Investment casting for body and cap
- Full bore
- Threaded ends: ANSI B2.1, BS21, ISO7/1
- Length: DIN3202-M3
- Pressure rating : 1000 PSI (PN63)
- Working temperature: -25°C +180°C
- Material: CF8M, CF8, CF3M, WCB

- 精密铸造德标三片式球阀（通径）
- 螺纹标准：ANSI B2.1, BS21, ISO7/1
- 阀门长度：DIN3202-M3
- 公称压力：1000 PSI(PN63)
- 工作温度：-25°C +180°C

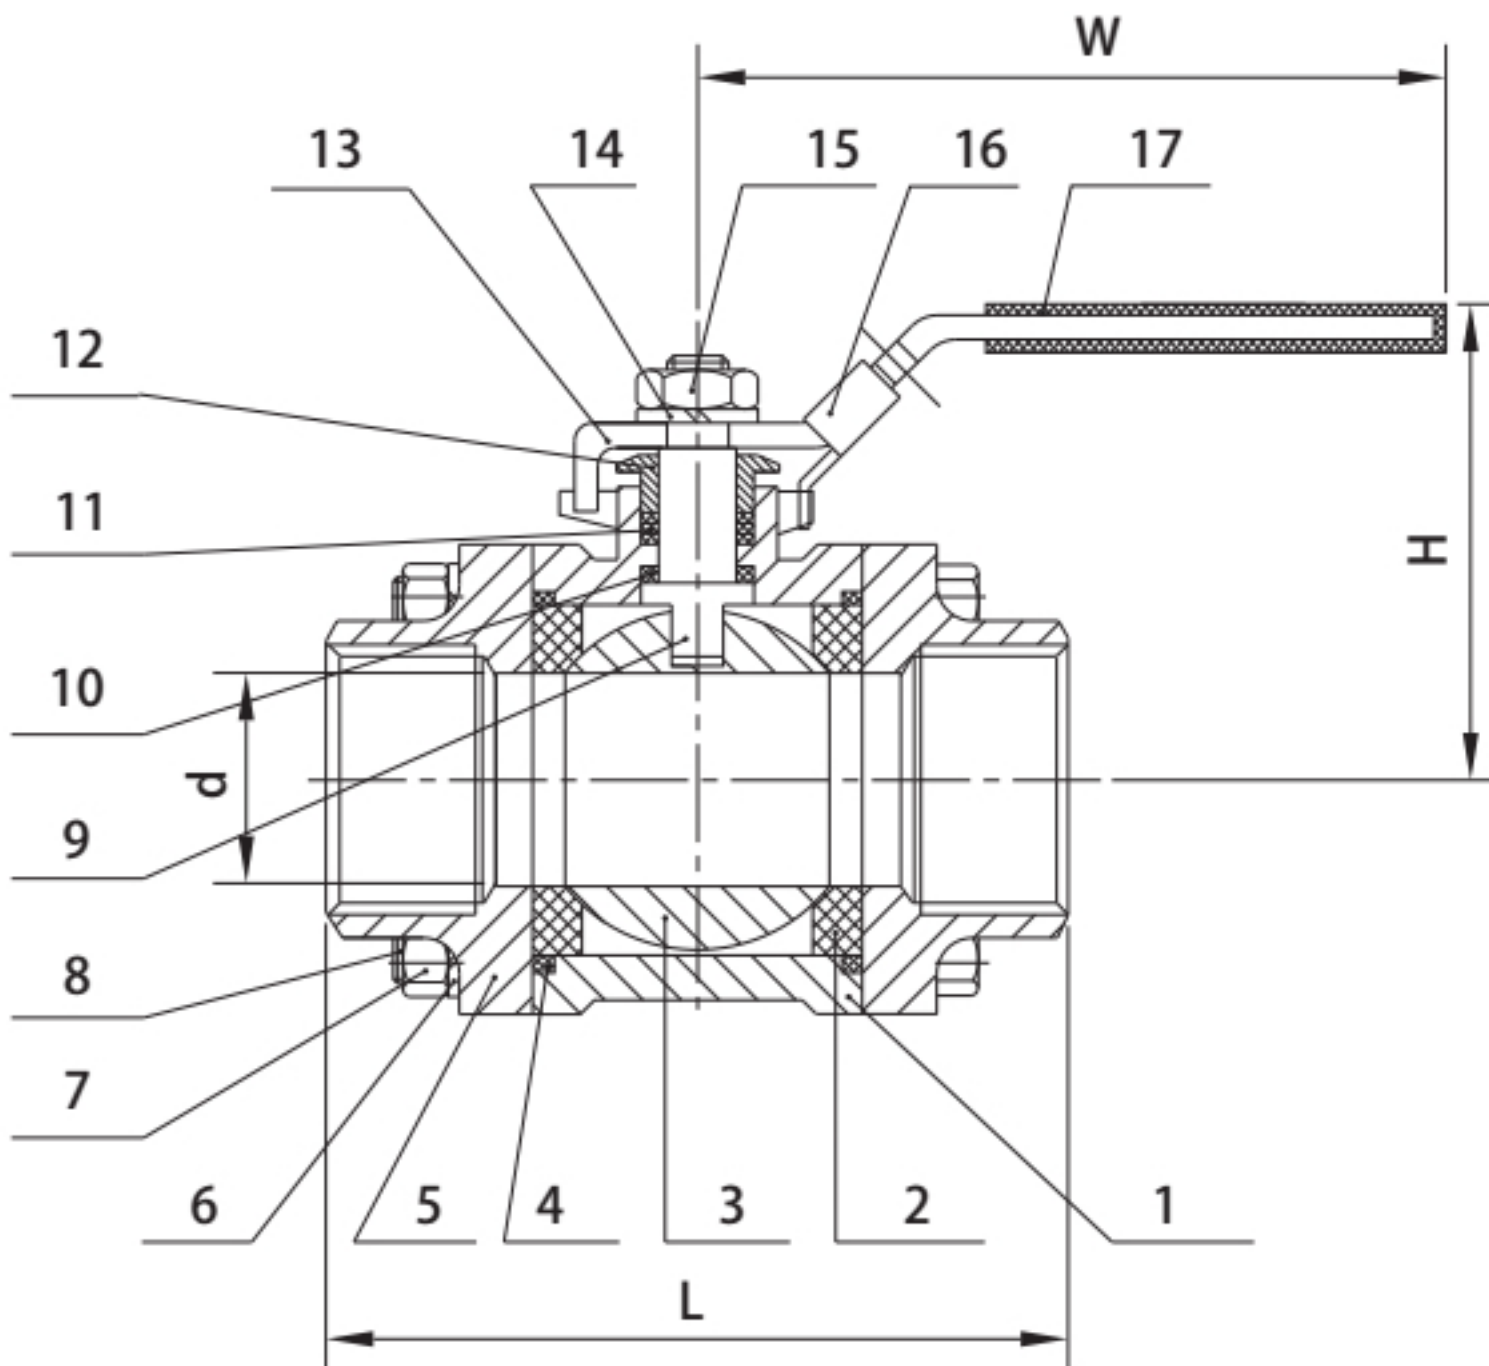

DIMENSION LIST

SIZE	D	L	H	W	N · m	Kgs
1/4"	11	50	51	105	4	0.40
3/8"	12.5	60	51	105	4	0.42
1/2"	15	75	53	118	5	0.45
3/4"	20	80	60	118	8	0.73
1"	25	90	75	150	10	1.04
1-1/4"	32	110	80	150	14	1.65
1-1/2"	40	120	88	182	18	2.43
2"	50	140	95	182	25	3.52
2-1/2"	65	185	121	254	48	7.14
3"	80	205	135	254	75	11.85
4"	100	240	158	285	110	20.05

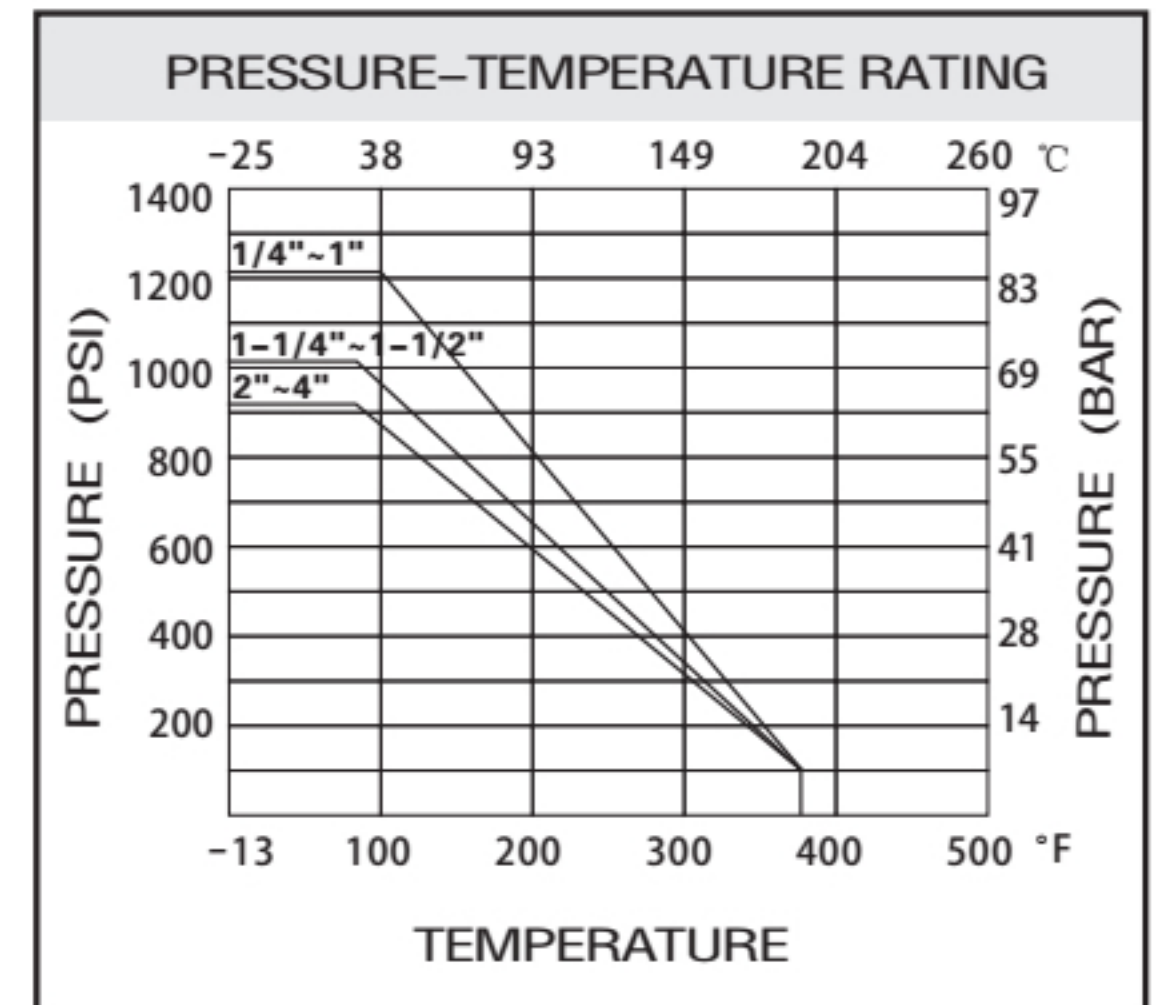

MATERIAL LIST

ITEM	PART	MATERIAL	QTY
1	Body	CF8M	1
2	Ball Seat	R-PTFE (15%)	2
3	Ball	SS316	1
4	Body Gasket	PTFE	2
5	Cap	CF8M	2
6	Spring Washer	SS304	4 (12)
7	Nut	SS304	4 (12)
8	Bolt	SS304	4 (6)
9	Stem	SS316	1
10	Thrust Washer	PTFE	1
11	Stem Packing	PTFE	1
12	Gland Nut	SS304	1
13	Handle	SS304	1
14	Spring Washer	SS304	1
15	Nut	SS304	1
16	Lock Device	SS304	1
17	Handle Cover	Plastic	1