


2-PC BALL VALVE (Reduce bore)

二片式球阀（缩径）

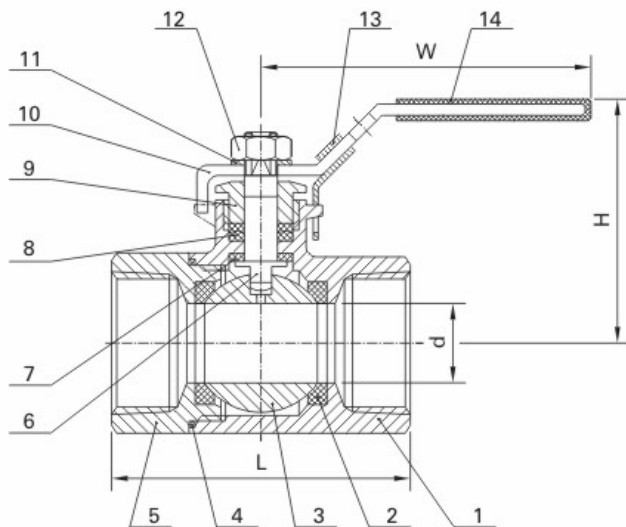


MV-22

- 螺纹标准: ISO, BS, DIN, JIS, ASME
- 公称压力: 2000 PSI (PN125)
- 工作温度: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- 材料: CF8M, CF8, CF3M, WCB
- Investment Casting For Body and Cap
- Thread: ISO, BS, DIN, JIS, ASME
- Pressure rating: 2000 PSI (PN125)
- Working temperature: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- Material: CF8M, CF8, CF3M, WCB

MATERIAL LIST

ITEM	PART	MATERIAL	QTY.
1	Body	CF8M	1
2	Ball Seat	R-PTFE(15%)	2
3	Ball	SS316	1
4	Body Gasket	PTFE	1
5	Cap	CF8M	1
6	Stem	SS316	1
7	Thrust Washer	PTFE	1
8	Packing	SS304	1
9	Gland Nut	SS304	1
10	Handle	SS304	1
11	Spring Washer	SS304	1
12	Nut	SS304	1
13	Lock Device	SS304	1
14	Handle Cover	PLASTIC	1

PRESSURE-TEMPERATURE RATING

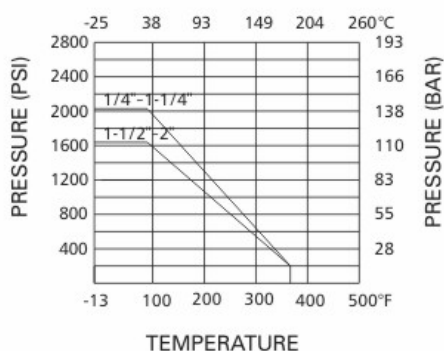

DIMENSION LIST

SIZE	d	L	H	W	N-m	Kgs
1/4"	9.5	54	42	106	4	0.24
3/8"	9.5	54	42	106	4	0.22
1/2"	12.7	61	46	106	5	0.32
3/4"	17.5	71	53	148	8	0.60
1"	22.2	85	58	148	10	0.89
1-1/4"	25.4	91	68	193	14	1.21
1-1/2"	31.7	102	72	193	18	1.75
2"	38.1	118	78	193	25	2.68