



Y-FLANGE STRAINER PN16

Y型德标法兰过滤器

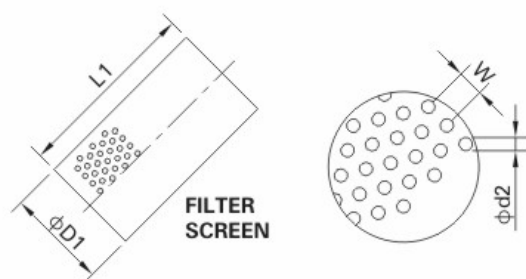

MV-41F

- 法兰标准: DIN EN1092-1
- 结构长度: EN558 series 1
DIN3202-F1
- 公称压力: PN16
- 工作温度: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- 材 料: CF8M, CF8, CF3M, WCB
- 自DN32起带排渣孔
- Investment casting for body and bonnet
- Flange ends: DIN EN1092-1
- Face to face: EN558 series 1
DIN3202-F1
- Pressure rating: PN16
- Working temperature: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- Material: CF8M, CF8, CF3M, WCB
- With blow-off from DN32

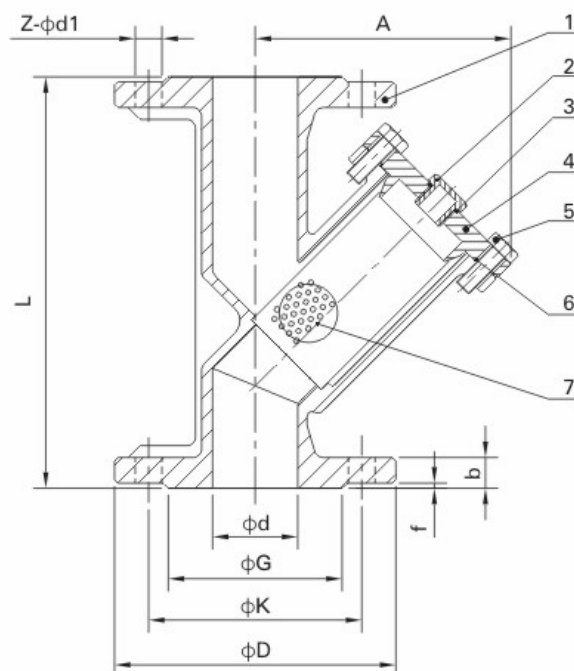

MATERIAL LIST

ITEM	PART	MATERIAL	QTY.
1	Body	CF8M	1
2	Blow Off Plug	CF8M	1
3	Gasket A	PTFE	1
4	Cap	CF8M	1
5	Bolt	SS304	4/6/8/10
6	Gasket B	PTFE	1
7	Filter Screen	SS316	1

DIMENSION LIST

SIZE	d	G	K	D	L	A	b	f	D1	L1	W	d2	z-φd1	Kgs
DN15	15	45	65	95	130	75	14	2	22	58	2	1	4-φ14	1.79
DN20	20	58	75	105	150	90	16	2	26	65	2	1	4-φ14	2.57
DN25	25	68	85	115	160	100	16	2	32	72	2	1	4-φ14	3.60
DN32	32	78	100	140	180	115	16	2	37	83	2	1	4-φ18	4.72
DN40	40	88	110	150	200	130	16	3	47	95	2	1	4-φ18	6.02
DN50	50	102	125	165	230	150	18	3	57	114	2	1	4-φ18	9.00
DN65	65	122	145	185	290	190	18	3	69	152	3.5	2	4-φ18	12.81
DN80	80	138	160	200	310	225	20	3	84	176	3.5	2	8-φ18	17.36
DN100	100	158	180	220	350	230	20	3	105	180	3.5	2	8-φ18	20.03
DN125	125	188	210	250	400	280	22	3	134	217.5	3.5	2	8-φ18	30.00
DN150	150	212	240	285	480	300	22	3	164	216	3.5	2	8-φ22	40.50
DN200	200	268	295	340	605	400	24	3	218	282.5	3.5	2	12-φ22	76.90