


NEEDLE VALVE

针阀

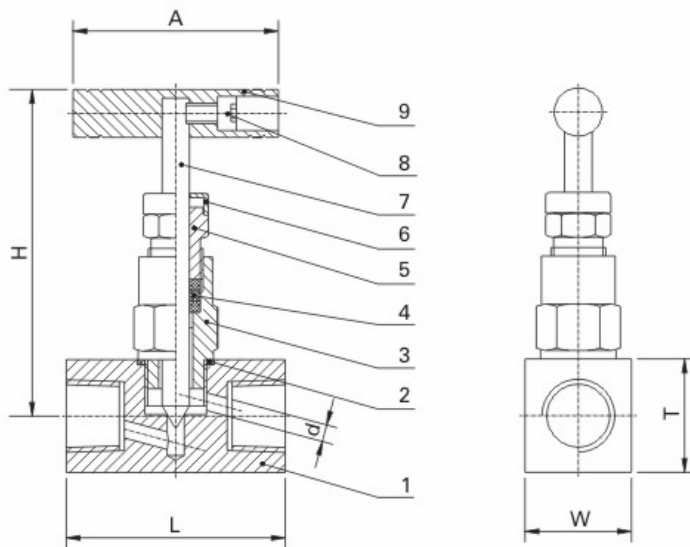

MV-62

- 螺纹标准: ISO, BS, DIN, JIS, ASME
- 公称压力: 3000PSI/6000PSI
- 工作温度: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- 材 料: SS316, SS304
- Forged for body
- Thread: ISO, BS, DIN, JIS, ASME
- Pressure rating: 3000PSI/6000PSI
- Working temperature: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- Material: SS316, SS304

MATERIAL LIST

ITEM	PART	MATERIAL	QTY.
1	Body	SS316	1
2	Bonnet Gasket	SS316	1
3	Bonnet	SS316	1
4	Packing	PTFE	3
5	Gland Nut	SS316	1
6	Protective Cover(1/4"~3/4")	PLASTIC	1
7	Stem	SS316	1
8	Screw	SS304	1
9	Handle	SS304	1

DIMENSION LIST

SIZE	d	A	L	H	W	T
1/4"	5	60	56	80	28	28
3/8"	5	60	56	80	28	28
1/2"	5	60	58	80	28	28
3/4"	6	60	62	85	35	35
1"	8	70	70	100	45	45
1-1/4"	12	100	90	125	55	55
1-1/2"	14	100	100	135	65	65
2"	18	110	110	155	78	78

