


2-PC BALL VALVE WITH MOUNTING PAD (PN130)

二片式球阀

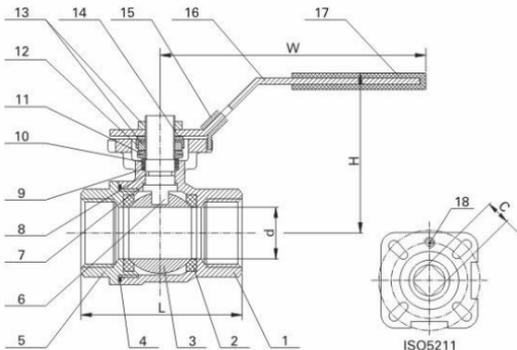

MV-26

- 螺纹标准: ISO, BS, DIN, JIS, ASME
 - 驱动盘标准: ISO5211
 - 长度标准: DIN3202-M3
 - 公称压力: 2000 PSI (PN130)
 - 工作温度: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
 - 材 料: CF8M, CF8, CF3M, WCB
- Investment casting for body and cap
 - Threaded: ISO, BS, DIN, JIS, ASME
 - Mounting Pad: ISO5211
 - Length: DIN3202-M3
 - Pressure rating: 2000 PSI (PN130)
 - Working temperature: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
 - Material: CF8M, CF8, CF3M, WCB

MATERIAL LIST

ITEM	PART	MATERIAL	QTY
1	Body	CF8M	1
2	Ball Seat	R-PTFE(15%)	2
3	Ball	SS316	1
4	Body Gasket	PTFE	1
5	Cap	CF8M	1
6	Stem	SS316	1
7	Thrust Washer	PTFE	1
8	O- Ring	VITON	1
9	Stem Packing	PTFE	2
10	Stem Ring	SS316	1
11	Belleville Washer	SS301	2
12	Nut Stopper	SS304	1
13	Nut	SS304	2
14	Plate Washer	SS304	2
15	Lock Device	SS304	1
16	Handle	SS304	1
17	Plastic Cover	PLASTIC	1
18	Stop Pin	SS304	1

DIMENSION LIST

SIZE	d	L	H	W	C	ISO5211	N.m
1/4"	11.5	50	65	115	9	F03	5
3/8"	12.5	60	65	115	9	F03	5
1/2"	15	75	65	117	9	F03/F04	5
3/4"	20	80	70	117	9	F03/F04	8
1"	25	90	75	134	11	F04/F05	10
1-1/4"	32	110	85	134	11	F04/F05	14
1-1/2"	40	120	95	203	14	F05/F07	18
2"	50	140	105	203	14	F05/F07	25
2-1/2"	65	185	140	255	17	F07/F10	48
3"	76	205	145	255	17	F07/F10	75
4"	94	240	175	302	17	F07/F10	110

PRESSURE-TEMPERATURE RATING

