


2-PC BALL VALVE (DIN Length)

二片式球阀（德标长度）

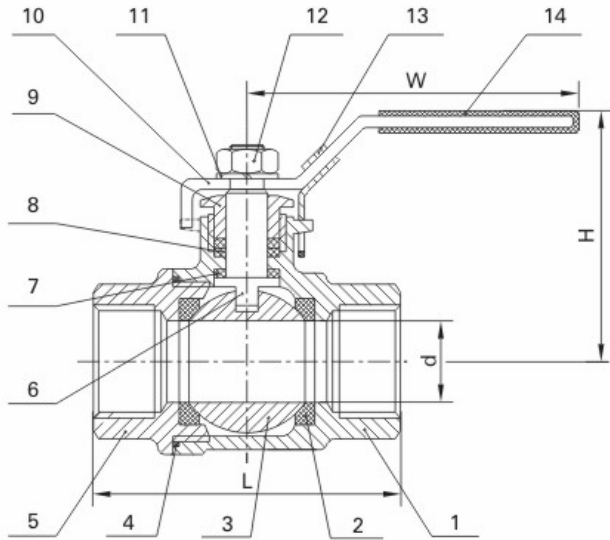


MV-23

- 通径
- 螺纹标准: ISO, BS, DIN, JIS, ASME
- 阀门长度: DIN3202 – M3
- 公称压力: 1000 PSI (PN63)
- 工作温度: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- 材 料: CF8M, CF8, CF3M, WCB
- Investment casting for body and cap
- Full bore
- Thread: ISO, BS, DIN, JIS, ASME
- Length: DIN3202 – M3
- Pressure rating: 1000 PSI (PN63)
- Working temperature: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- Material: CF8M, CF8, CF3M, WCB

MATERIAL LIST

ITEM	PART	MATERIAL	QTY.
1	Body	CF8M	1
2	Ball Seat	R-PTFE(15%)	1
3	Ball	SS316	1
4	Body Gasket	PTFE	1
5	Cap	CF8M	1
6	Stem	SS316	1
7	Thrust Washer	PTFE	1
8	Stem Packing	PTFE	2
9	Gland Nut	SS304	1
10	Handle	SS304	1
11	Spring Washer	SS304	1
12	Nut	SS304	1
13	Lock Device	SS304	1
14	Handle Cover	PLASTIC	1

PRESSURE-TEMPERATURE RATING

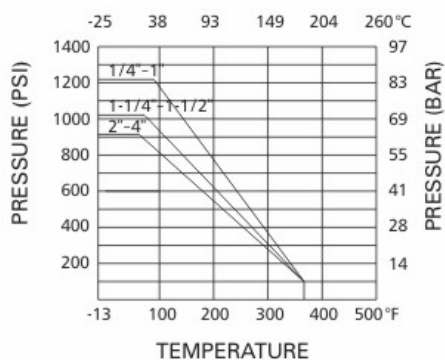

DIMENSION LIST

SIZE	d	L	H	W	N·m	Kgs
1/4"	6	50	50	105	4	0.22
3/8"	10	60	50	105	4	0.20
1/2"	15	75	52	105	5	0.34
3/4"	20	80	57	118	8	0.52
1"	25	90	78	150	10	0.78
1-1/4"	32	110	88	150	14	1.23
1-1/2"	40	120	95	182	18	2.00
2"	50	140	100	182	25	2.98
2-1/2"	65	185	120	254	48	6.05
3"	80	205	130	254	75	9.90
4"	100	240	160	285	110	16.60