


2-PC BALL VALVE WITH SPRING RETURN

二片式复位球阀(通径)

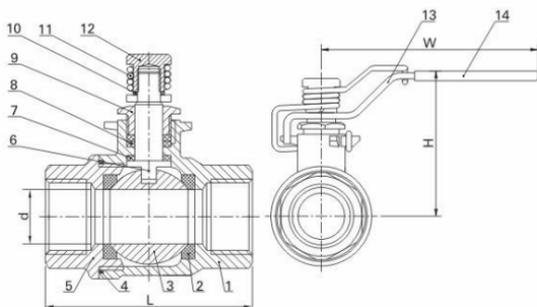


MV-23/25-SE

- 螺纹标准: ISO, BS, DIN, JIS, ASME
- 公称压力: 1000 PSI (PN63)
- 工作温度: -25°C~+180°C
- 材 料: CF8M, CF8, CF3M, WCB
- Investment casting for body and cap
- Full bore
- Threaded: ISO, BS, DIN, JIS, ASME
- Pressure rating: 1000 PSI (PN63)
- Working temperature: -25°C~+180°C
- Material: CF8M, CF8, CF3M, WCB

MATERIAL LIST

ITEM	PART	MATERIAL	QTY.
1	Body	CF8M	1
2	Ball Seat	R-PTFE(15%)	2
3	Ball	SS316	1
4	Body Gasket	PTFE	1
5	Cap	CF8M	1
6	Stem	SS316	1
7	Thrust Washer	PTFE	1
8	Stem Packing	PTFE	1
9	Gland Nut	SS304	1
10	Spring Washer	SS304	1
11	Spring	SS301	1
12	Stem Nut	SS304	1
13	Handle	SS304	1
14	Handle Cover	PLASTIC	1

PRESSURE-TEMPERATURE RATING



DIMENSION LIST

	SIZE	d	L	H	W
23-SE	1/4"	6	50	50	105
25-SE	1/4"	11.5	49	54	105
23-SE	3/8"	10	60	50	105
25-SE	3/8"	12.5	49	54	105
23-SE	1/2"	15	75	52	105
25-SE	1/2"	15	57	56	105
23-SE	3/4"	20	80	57	118
25-SE	3/4"	20	64	65	118
23-SE	1"	25	90	78	150
25-SE	1"	25	77	70	150