






MV-41B

Y-Strainer with Blow off

- Investment casting for body and bonnet
 - Threaded ends: ANSI B2.1, BS21, ISO7/1
 - Pressure rating: 800 PSI (PN40)
 - Working temperature: -25°C $+180^{\circ}\text{C}$
 - Material: CF8M, CF8, CF3M
 - With blow-off
-
- 精密铸造Y型过滤器(带泄孔)
 - 螺纹标准: ANSI B2.1, BS21, ISO7/1
 - 公称压力: 800 PSI(PN40)
 - 工作温度: -25°C $+180^{\circ}\text{C}$
 - 材 料: CF8M, CF8, CF3M
 - 带排渣孔

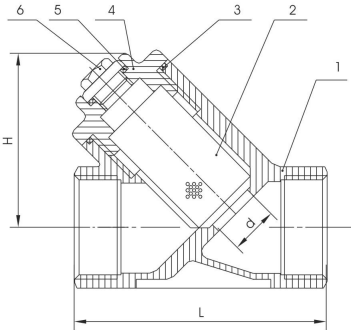

DIMENSION LIST

SIZE	d	L	H	W	d1	Kgs
1/4"	10	64	43	2	1	0.22
3/8"	12	64	43	2	1	0.22
1/2"	15	64	45	2	1	0.23
3/4"	20	80	52	2	1	0.35
1"	25	90	68	2	1	0.62
1-1/4"	32	106	70	2	1	0.84
1-1/2"	40	119	80	2	1	1.08
2"	50	140	98	2	1	1.65
2-1/2"	61	167	117	2	1	2.69
3"	75	198	137	2	1	4.83
4"	94	238	163	2	1	7.65

MATERIAL LIST

ITEM	PART	MATERIAL	QTY
1	Body	CF8M	1
2	Screen	SS316	1
3	Joint Gasket	PTFE	1
4	Bonnet	CF8M	1
5	O-ring	VITON	1
6	Blow Off	SS316	1