



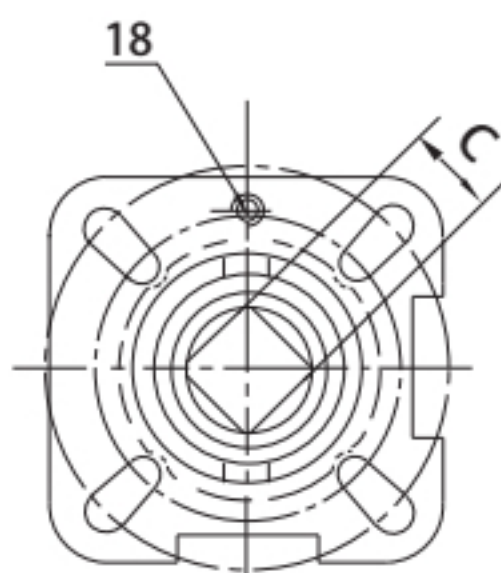


MV-14 (1/2"~4")

1-pc Wafer Flange Ball Valve

- Investment casting for body and cap
- Flanged ends: 1/2"~2" (PN16/25/40): DIN2543/2544/2545
- 2-1/2"~4" (PN16): DIN2543
- Pressure rating: 1/2"~2": PN16/25/40
- 2-1/2"~4": PN16
- Working temperature: -25°C +180°C
- Material: CF8M, CF8, CF3M, WCB
- 精密铸造一片对夹式法兰球阀
- 法兰标准: 1/2"~2" (PN16/25/40): DIN2543/2544/2545
- 2-1/2"~4" (PN16): DIN2543
- 公称压力: 1/2"~2": PN16/25/40
- 2-1/2"~4": PN16
- 工作温度: -25°C +180°C

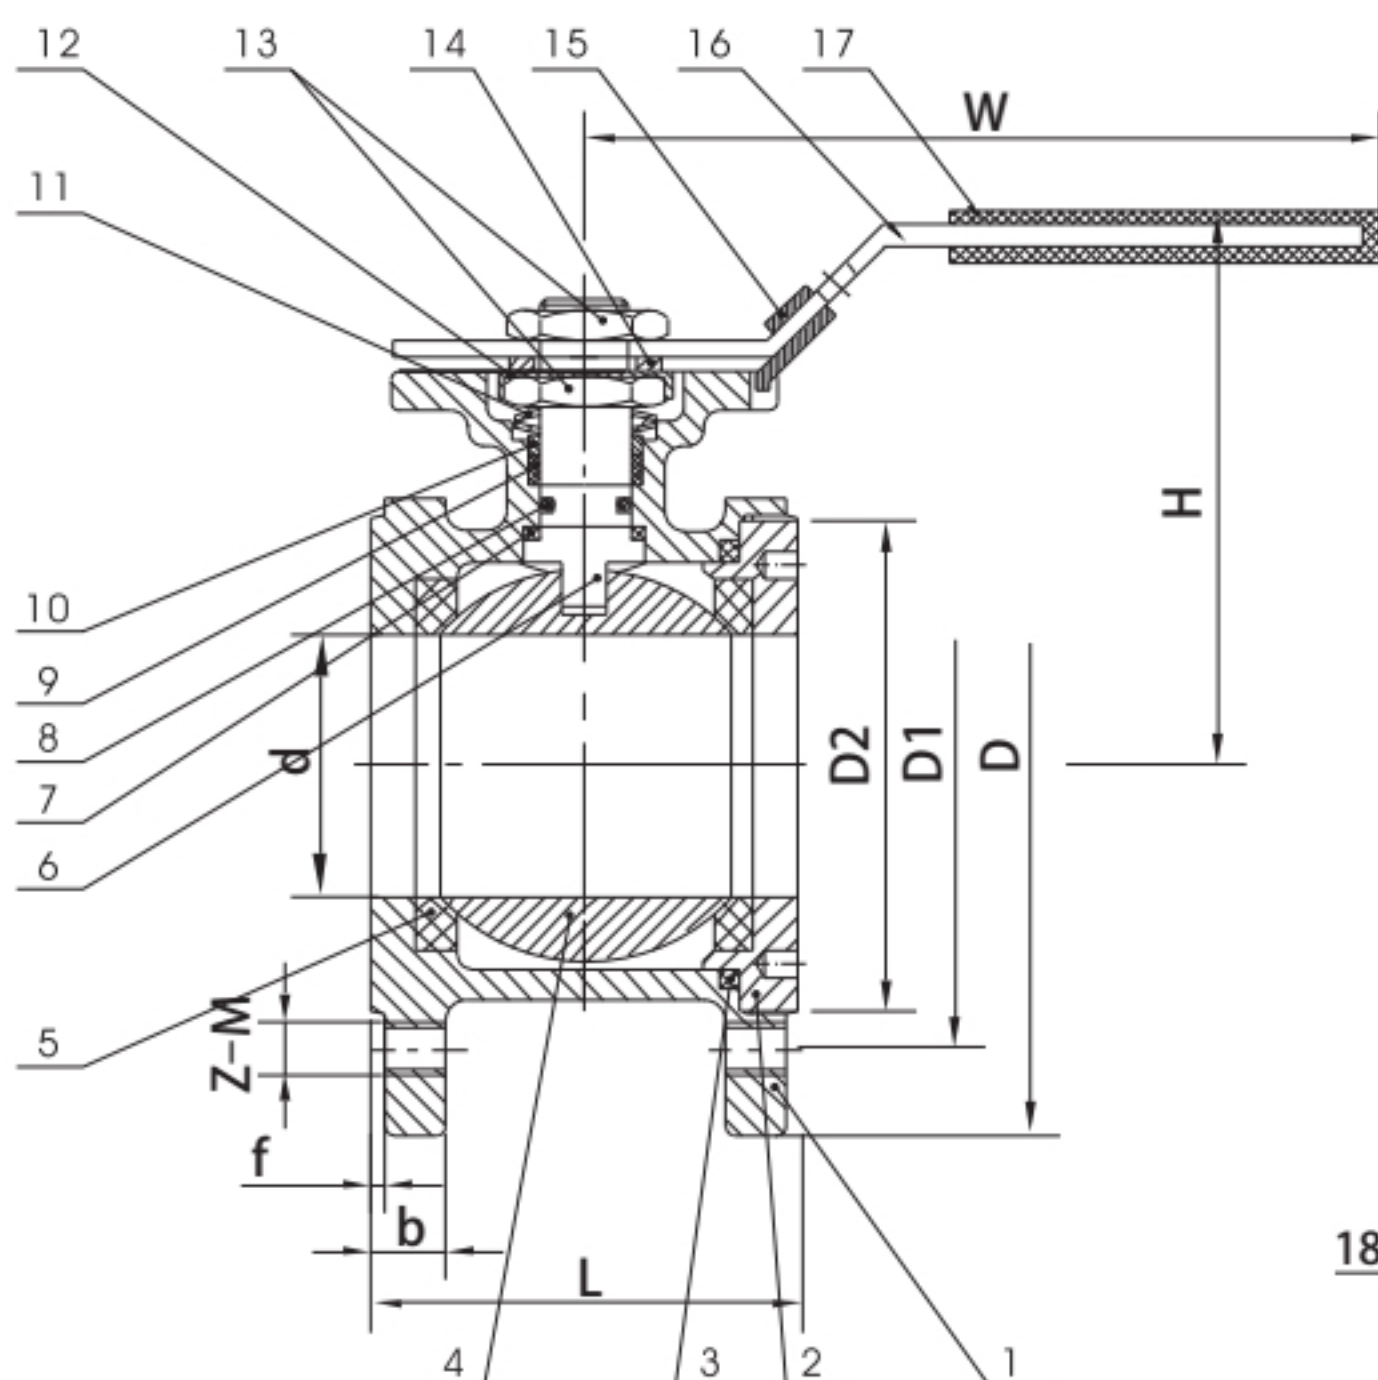

ISO5211

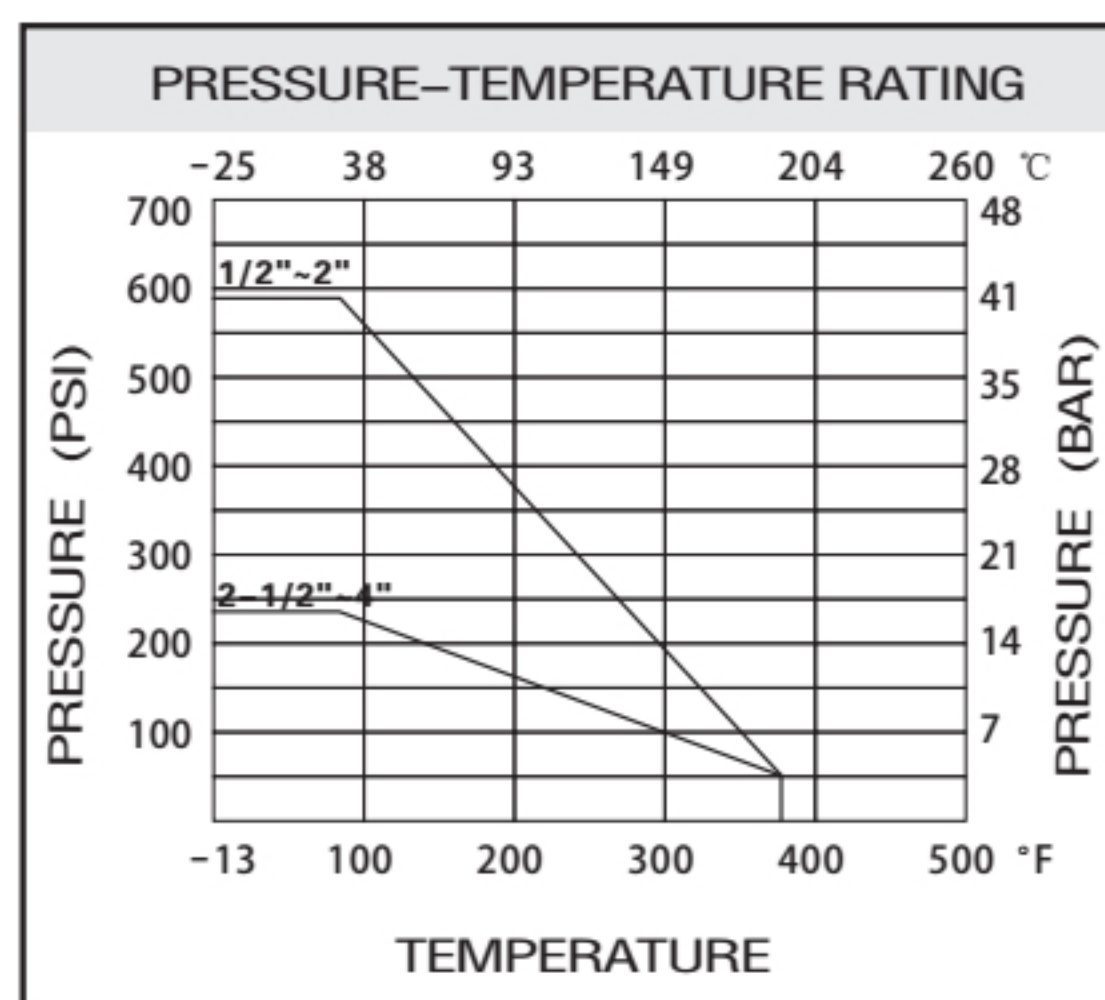

DIMENSION LIST

SIZE	d	L	D	D1	D2	b	f	H	W	C	ISO5211	Z-M	N·m	Kgs
DN15	15	36	95	65	45	11	2	89	117	9	F03/F04	4-M12	5	1.21
DN20	20	38	105	75	58	11	2	94	117	9	F03/F04	4-M12	8	1.53
DN25	25	50	115	85	68	12	2	90	164	11	F04/F05	4-M12	10	1.95
DN32	32	53	140	100	78	14	2	100	164	11	F04/F05	4-M16	14	3.10
DN40	40	65	150	110	88	15	3	105	203	14	F05/F07	4-M16	18	4.18
DN50	50	78	165	125	102	16	3	125	203	14	F05/F07	4-M16	25	5.37
DN65	65	98	185	145	122	16	3	140	255	17	F07/F10	4-M16	48	10.10
DN80	76	118	200	160	138	18	3	145	255	17	F07/F10	8-M16	75	12.30
DN100	94	140	220	180	158	18	3	175	302	17	F07/F10	8-M16	110	19.40

MATERIAL LIST

ITEM	PART	MATERIAL	QTY
1	Body	CF8M	1
2	Cap	CF8M	1
3	Body Gasket	PTFE	1
4	Ball	SS316	1
5	Ball Seat	R-PTFE (15%)	2
6	Stem	SS316	1
7	Thrust Washer	PTFE	1
8	O-ring	VITON	1
9	Stem Packing	PTFE	1
10	Packing Ring	SS304	1
11	Belleville Washer	SS301	2
12	Nut Stopper	SS304	1
13	Nut	SS304	2
14	Plate Washer	SS304	2
15	Lock Device	SS304	1
16	Handle	SS304	1
17	Plastic Cover	Plastic	1
18	Stop Pin	SS304	1