


Y-STRAINER

Y型过滤器

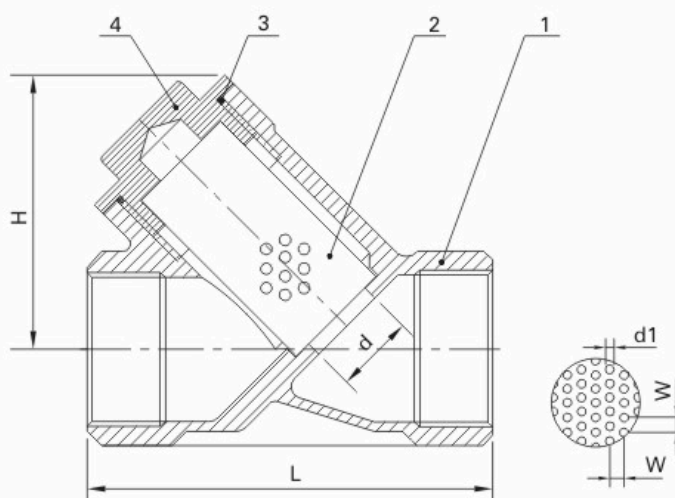

MV-41

- 螺纹标准: ISO, BS, DIN, JIS, ASME
- 公称压力: 800PSI (PN40)
- 工作温度: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- 材 料: CF8M, CF8, CF3M
- Investment casting for body and bonnet
- Thread: ISO, BS, DIN, JIS, ASME
- Pressure rating: 800PSI (PN40)
- Working temperature: $-25^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- Material: CF8M, CF8, CF3M

MATERIAL LIST

ITEM	PART	MATERIAL	QTY.
1	Body	CF8M	1
2	Screen	SS316	1
3	Body Gasket	PTFE	1
4	Bonnet	CF8M	1

DIMENSION LIST

SIZE	d	L	H	W	d1	Kgs
1/4"	10	64	43	2	1	0.20
3/8"	12	64	43	2	1	0.20
1/2"	15	64	45	2	1	0.21
3/4"	20	80	52	2	1	0.34
1"	25	90	68	2	1	0.59
1-1/4"	32	106	70	2	1	0.80
1-1/2"	38	119	80	2	1	1.06
2"	50	140	98	2	1	1.61
2-1/2"	61	167	117	2	1	2.99
3"	75	198	137	2	1	4.74
4"	94	238	163	2	1	7.88

PRESSURE-TEMPERATURE RATING

